
GENESIS X

5-25X56 FFP MRAD

OVERVIEW

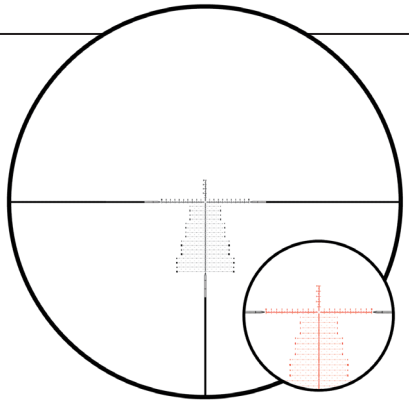

Ready for competition? Not unless you've got the **GENESIS X** locked and loaded! This is what serious shooting is all about. With a massive 34MRAD elevation travel, bold, ultra-precise turrets, a rock-solid Zero Stop, and our legendary Japanese ED Glass, this scope means business.

The PRO Reticle's fine 0.2 MRAD sub-tension lines and that crisp floating center dot make nailing those targets second nature. Whether diving into PRS or pushing the limits in NRL 22, the **GENESIS X 5-25x56 FFP MRAD** has you covered.

FEATURES



Aluminum Grade	Aircraft
Lens Elements	ED Etched Red Illumination
Shockproof	10 000g / 20 000 times
Waterproof	IPX7
ZERO STOP	YES

SPECIFICATIONS

Magnification	5-25x
Objective Lens Diameter	56mm
Focal Plane	First Focal Plane
Reticle	PROComp Etched
Eye Relief	88 - 92mm
Field of View @ 100yds	4.45° ~ 0.89'
Click Value	0.1 MRAD / 0.25 MOA
Tube Size	34mm
Elevation Adjustment	35 MIL
Windage Adjustment	22 MIL
Adjustment Range	20 ~ ∞ yds
Length	403mm
Weight	1100g

Torque Settings:

- **Ring Bases on Picatinny:** 40 in-lbs
- **Scope Mounts:** 15-18 in-lbs

Setting Up Your Scope

Before Sighting In

Once your scope is mounted and leveled by your gunsmith, remove the Zero Stop located inside the Elevation turret to prepare for sighting in.

Removing the Zero Stop

- Unscrew the elevation turret cap with the plastic tool provided in your scope box.
- Gently lift the turret cap off to access the Zero Stop inside.
- Pull the black Zero Stop ring up to remove it.

Setting the Zero Stop After Zeroing

- After zeroing your rifle, replace the Zero Stop ring by turning it in the direction indicated by the arrow.
- Set the turret cap back to zero and tighten the screw.

Final Steps

Replace the turret cap and continue sighting in your scope. Once your sight-in is complete at the desired distance, securely tighten the Zero Stop as described.

